




## VARDAflex Neon TVQ S?-?? Flex. LED-Strip, 24V, 11W/m, 3000K, CRI80

Article nr.: SPHF059

Flexible LED-Strip sealed in UV, chlorine, salt water · and solvent-resistant white PVC · for indoor- and outdoor use, IP67/68 · · cuttable every 56.56 mm or 6 LED · Number of LED per metre: 108 · LED Pitch: 9.26 mm · Beam Angle: 160° · CRI: > 80 · Luminous flux per meter: 540 lm · Power per meter: 11 W · Lifespan L70: >= 36.000 h · WxH in mm: 16 x 17 · · Temperature range: -20 bis +45°C · Processing temperature: +10 bis +45°C · Maximum length per connection: 10 metres · Bending diameter: 300 mm · anti-wicking ferrule diameter = 12 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable.

### TECHNICAL DATA

|                     |                    |
|---------------------|--------------------|
| Unit Code           | metre              |
| BAR code            | 4251835860598      |
| Housing colour      | Weiss              |
| Width               | 16.00 mm           |
| Height              | 17.00 mm           |
| LED colour          | ca. 3000K warmweiß |
| Lightoutput per LED | 5.00 lm            |
| Lamp                | Inklusive LED      |
| IP rating           | 68                 |
| Voltage             | 24 V               |

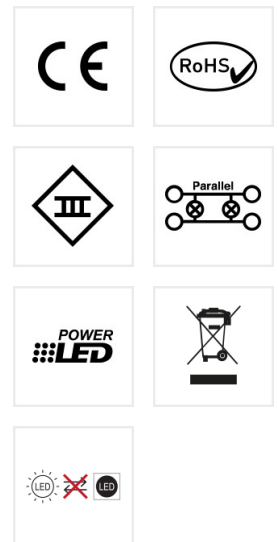




## VARDAflex Neon TVQ S?-?? Flex. LED-Strip, 24V, 11W/m, 3000K, CRI80

Article nr.: SPHF059

### TECHNICAL DATA

|                       |            |
|-----------------------|------------|
| Material              | Kunststoff |
| Temperature range     | -20 - 45   |
| LED per meter         | 108        |
| Dimension of segments | 55.56 mm   |
| CRI                   | ≥ 80       |

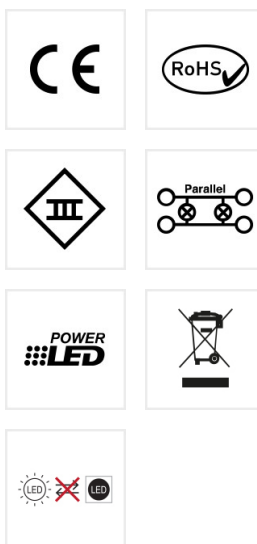




**VARDAflex Neon TVQ S?-?? Flex. LED-  
Strip, 24V, 11W/m, 3000K, CRI80**  
Article nr.: SPHF059

## TECHNICAL DRAWING

---

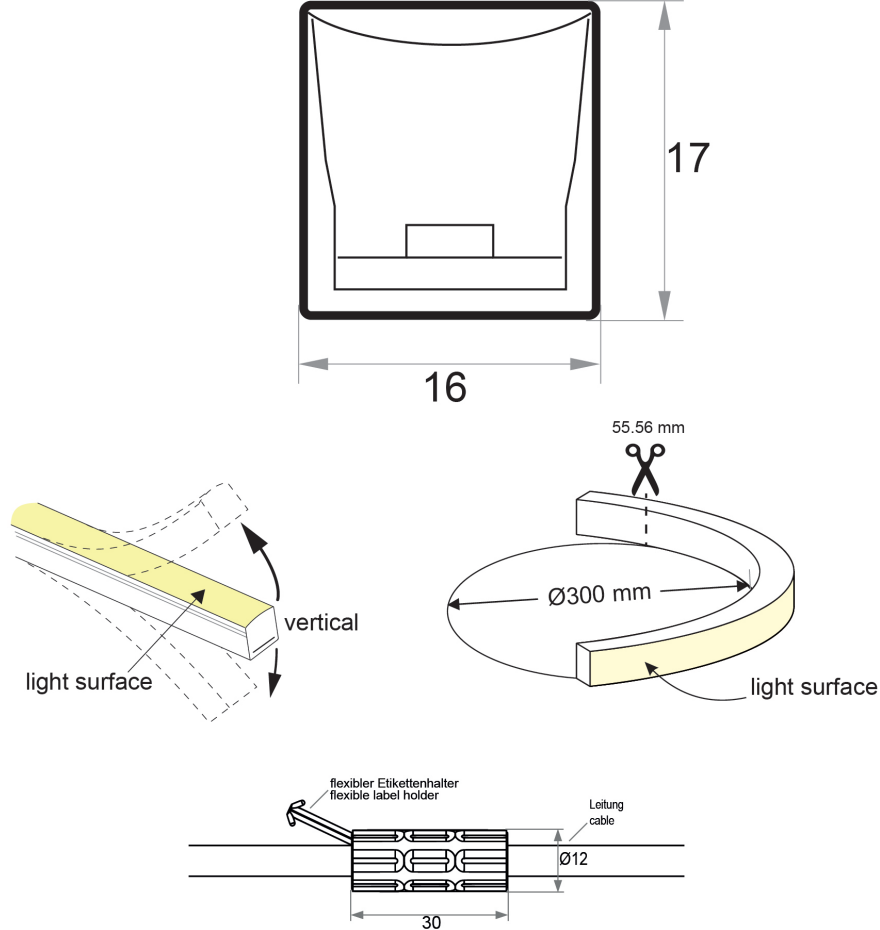

#### Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

#### Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.