




VARDAflex Neon Select S?-?? Flex. LED-Strip, 24V, 12W/m, 1900-5700K

Article nr.: SPHF009

Flexible LED Stripe sealed in UV-, chlorine-, salt water- and solvent resistant white PVC · for indoor- and outdoor use, IP67/68 · Cuttable every 83.33 mm / 12 LEDs · Amount of LEDs per meter: 144 · LED pitch: 6.94 mm · Beam angle: 160° · CRI: >70 · Light flux per meter: 265 lm · Voltage: 24V DC · Power per Meter: 12 W · Lifetime L70: >= 36.000 h · WxH in mm: 11.5 x 21 · Temperature range: -20 to +45°C · Processing temperature: +10 to +45°C · Maximum length per connection: 10 meter · Bending diameter: 120 mm · anti-wicking ferrule diameter = 15 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835860093
Housing colour	mehrfarbig
Width	11.50 mm
Height	21.00 mm
LED colour	1900-5700K tunable white
Lightoutput per LED	1.84 lm
Lamp	Inklusive LED
IP rating	68
Voltage	24 V

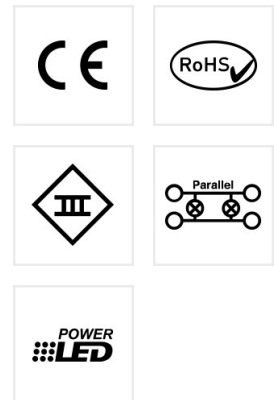




VARDAflex Neon Select S?-?? Flex. LED-Strip, 24V, 12W/m, 1900-5700K

Article nr.: SPHF009

TECHNICAL DATA

Material	Kunststoff
Temperature range	-20 - 45
LED per meter	144
Dimension of segments	83.33 mm
CRI	≥ 70









VARDAflex Neon Select S?-?? Flex. LED-Strip, 24V, 12W/m, 1900-5700K

Article nr.: SPHF009

TECHNICAL DRAWING

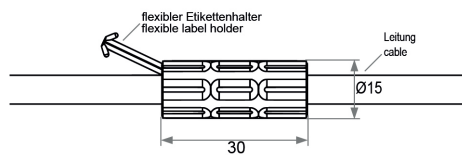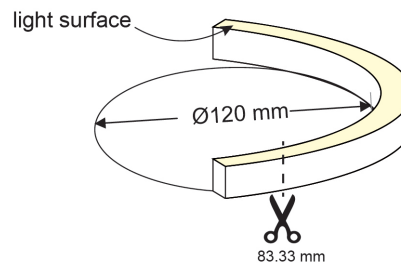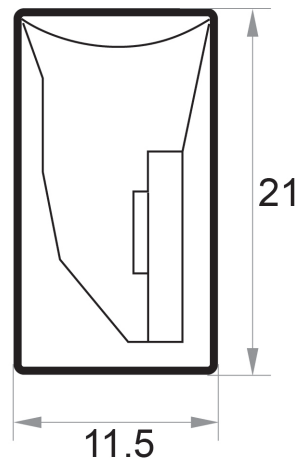

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.