




VARDAflex Neon TVQ S?-?? Flex. LED-Strip, 24V, 11W/m, 3500K

Article nr.: SPHF055

Flexible LED Stripe sealed in UV-, chlorine-, · salt water-, solventresistant white PVC · for indoor- and outdoor use, IP67/68 · · Cuttable every 55,56 mm / 6 LEDs · Amount of LEDs per meter: 108 · LED pitch: 9,26 mm · Beam angle: 160° · CRI: >70 · Luminous flux per meter: 495 lm · Voltage: 24V DC · Power per Meter: 11 W · Lifetime L70: >= 36.000 h · WxH in mm: 16 x 17 · · Temperature range: -20 to +45°C · Processing temperature: +10 to +45°C · Maximum length per connection: 10 meter · Bending radius: 300 mm · anti-wicking ferrule diameter = 12 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835860550
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 3500 K warmweiß
Lightoutput per LED	4.58 lm
Lamp	Inklusive LED
IP rating	68
Voltage	24 V

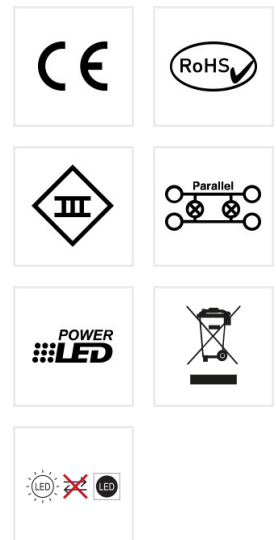




VARDAflex Neon TVQ S?-?? Flex. LED-Strip, 24V, 11W/m, 3500K
Article nr.: SPHF055

TECHNICAL DATA

Material	Kunststoff
Temperature range	-20 - 45
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 70

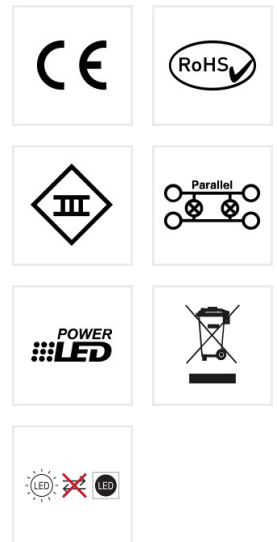




**VARDAflex Neon TVQ S?-?? Flex. LED-
Strip, 24V, 11W/m, 3500K**

Article nr.: SPHF055

TECHNICAL DRAWING

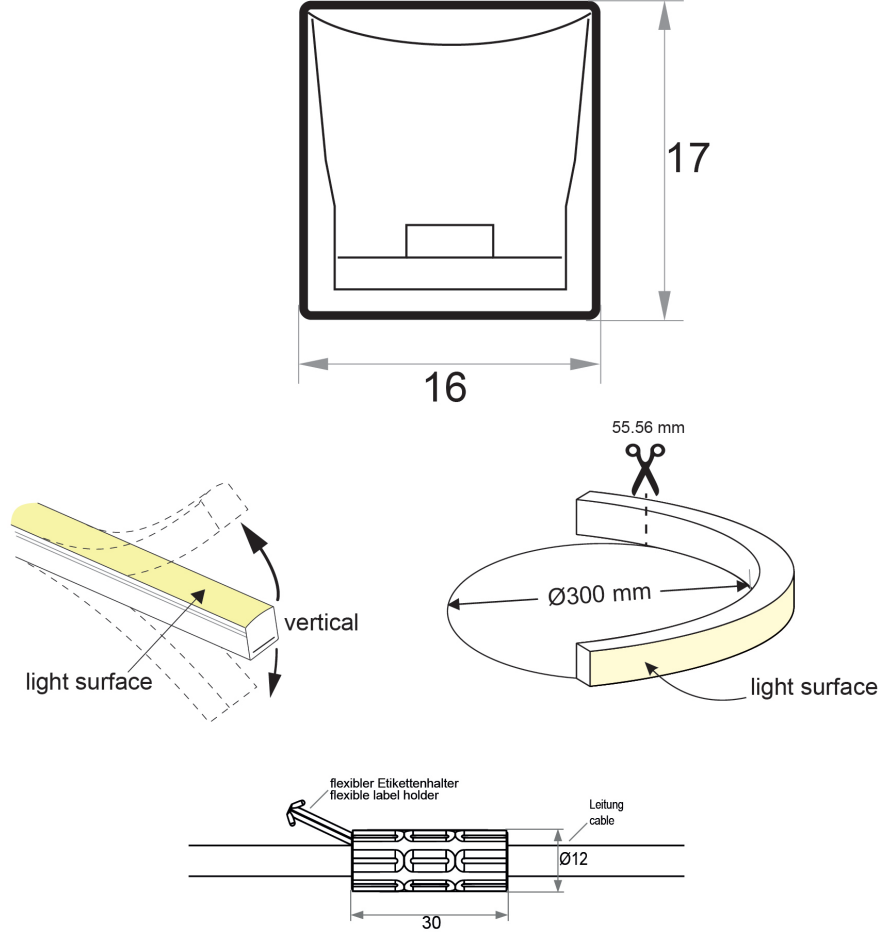

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.