




**VARDAflex Neon TVQ RGBW S?-?? Flex.
LED-Strip, 24V, 15W/m, RGBW+3000K**
Article nr.: SPHF066

flexible LED Stripe sealed in UV-, chlorine-, · salt water- and solvent resistant white PVC · for indoor- and outdoor use, IP68 · cuttable every 83.33 mm / 7 LEDs · amount of LEDs per meter: 84 · LED pitch: 11.91 mm · beam angle: 160° · CRI: >80 · luminous flux per meter: 721 lm · power per meter: 15 W · lifetime L70: >= 36.000 h · WxH in mm: 16 x 17 · temperature range: -20 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending diameter: 300 mm · attention: do not run all colors at same time on · maximum load (max. 80%) · anti-wicking ferrule diameter = 15 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835860666
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	RGBW 3000K
Lightoutput per LED	8.58 lm
Lamp	Inklusive LED
IP rating	68
Voltage	24 V

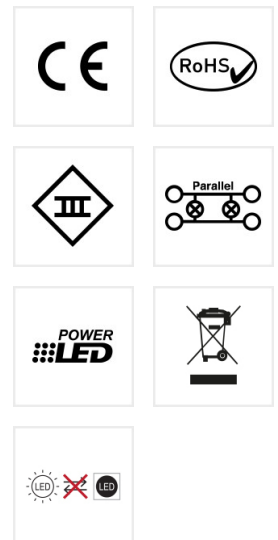




VARDAflex Neon TVQ RGBW S?-?? Flex.
LED-Strip, 24V, 15W/m, RGBW+3000K
 Article nr.: SPHF066

TECHNICAL DATA


Material	Kunststoff
Temperature range	-20 - 45
LED per meter	84
Dimension of segments	83.33 mm
CRI	≥ 80

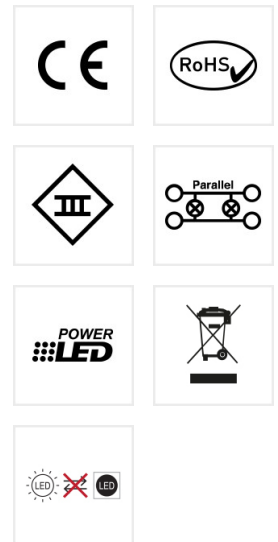



**VARDAflex Neon TVQ RGBW S?-?? Flex.
LED-Strip, 24V, 15W/m, RGBW+3000K**
Article nr.: SPHF066

TECHNICAL DRAWING

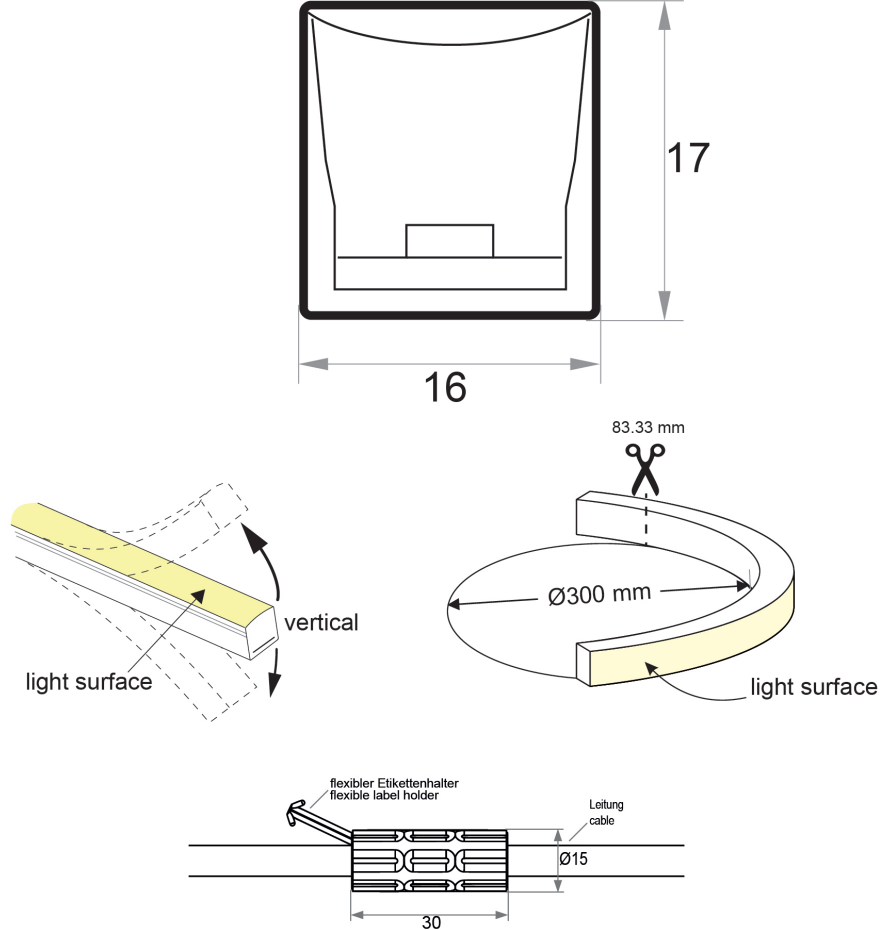

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.