




VARDAflex Neon TVQ RGB S?-?? Flex. LED-Strip, 24V, 12W/m, RGB

Article nr.: SPHF071

Flexible LED Stripe sealed in UV-, chlorine-, salt water- and solvent resistant white PVC · for indoor- and outdoor use, IP68 · Cuttable every 83.33 mm / 7 LEDs · Amount of LEDs per metre: 84 · LED pitch: 11.91 mm · Beam angle: 160° · CRI: - · Light flux per meter: 450 lm · Voltage: 24 V DC · Power per metre: 12 W · Lifetime L70: >= 36.000 h · WxH in mm: 16 x 17 · Temperature range: -20 to +45°C · Processing temperature: +10 to +45°C · Maximum length per connection: 7 meters · bending diameter: 300 mm · anti-wicking ferrule diameter = 15 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835860710
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	RGB
Lightoutput per LED	5.36 lm
Lamp	Inklusive LED
IP rating	68
Voltage	24 V

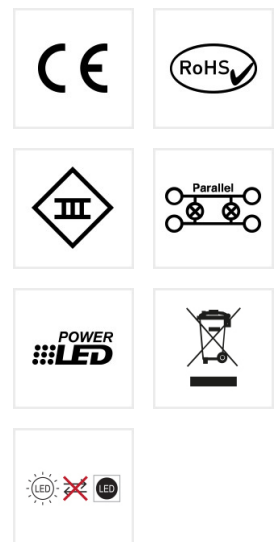




VARDAflex Neon TVQ RGB S?-?? Flex.
LED-Strip, 24V, 12W/m, RGB
 Article nr.: SPHF071

TECHNICAL DATA


Material	Kunststoff
Temperature range	-20 - 45
LED per meter	84
Dimension of segments	83.33 mm

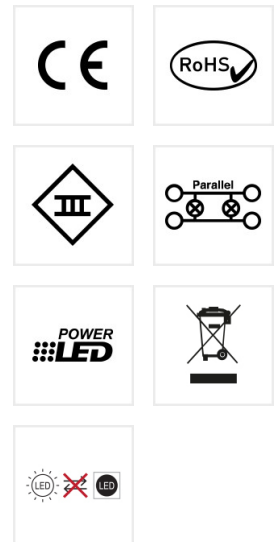



VARDAflex Neon TVQ RGB S?-?? Flex.
LED-Strip, 24V, 12W/m, RGB
Article nr.: SPHF071

TECHNICAL DRAWING

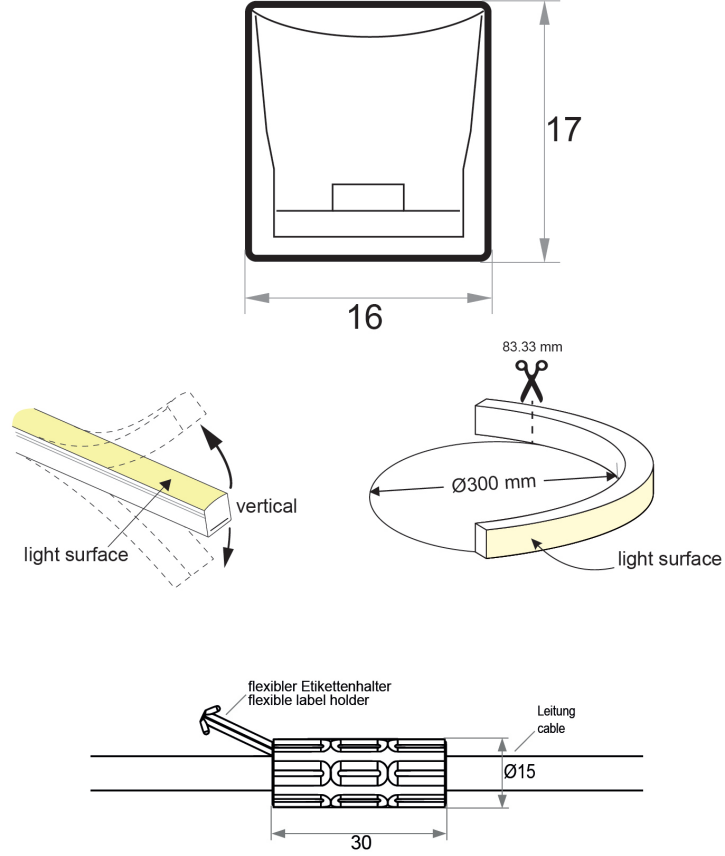

Wasserstop*

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule*

The anti-wicking ferrule is located at 115 mm from the connector on the cable.

*Der Wasserstop ist nicht enthalten bei Bestellungen über rulec Lightdesign.
 *The anti-wicking ferrule is not included in orders placed via rulec Lightdesign.