




**VARDAflex Neon Piko SVQ S?-?? Flex.  
LED-Strip, 24V, 4, 5W/m, Amber**  
Article nr.: SPHF611

Flexible LED-Strip sealed in UV, chlorine, salt water · and solvent-resistant white PVC · for indoor- and outdoor use, IP20/66 · cuttable every 83.33 mm or 12 LED · Number of LED per metre: 144 · LED Pitch: 6.94 mm · Beam Angle: 160° · CRI: > - · Luminous flux per meter: 55 lm · Power per meter: 4.5 W · Lifespan L70: >= 36.000 h · WxH in mm: 10 x 10 · Temperature range: -20 bis +45°C · Processing temperature: +10 bis +45°C · Maximum length per connection: 10 metres · Bending diameter: 100 mm

## TECHNICAL DATA

|                         |               |
|-------------------------|---------------|
| Unit Code               | metre         |
| BAR code                | 4251835866118 |
| Housing colour          | Weiss         |
| Width                   | 10.00 mm      |
| Height                  | 10.00 mm      |
| LED colour              | Gelb/Amber    |
| Lightoutput per fixture | 55.00 lm      |
| Lightoutput per LED     | 0.38 lm       |
| Lamp                    | Inklusive LED |
| IP rating               | 66            |

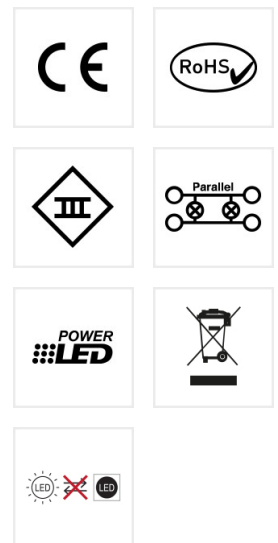




**VARDAflex Neon Piko SVQ S?-?? Flex.**  
**LED-Strip, 24V, 4, 5W/m, Amber**  
 Article nr.: SPHF611

## TECHNICAL DATA





|                       |            |
|-----------------------|------------|
| Voltage               | 24 V       |
| Material              | Kunststoff |
| Temperature range     | -20 - 45   |
| LED per meter         | 144        |
| Dimension of segments | 83.33 mm   |

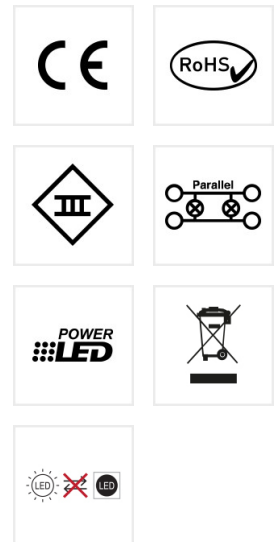



**VARDAflex Neon Piko SVQ S?-?? Flex.**  
**LED-Strip, 24V, 4, 5W/m, Amber**  
 Article nr.: SPHF611

## TECHNICAL DRAWING

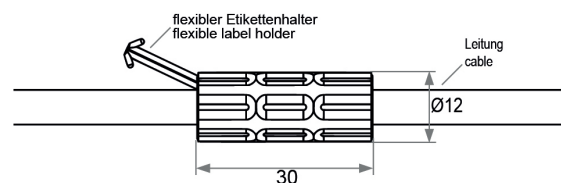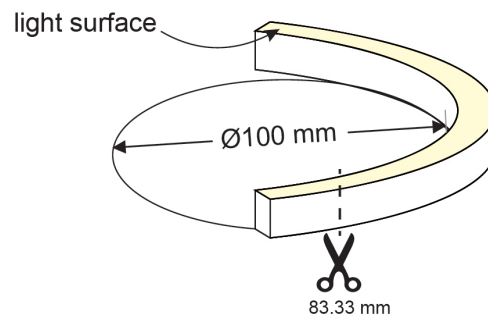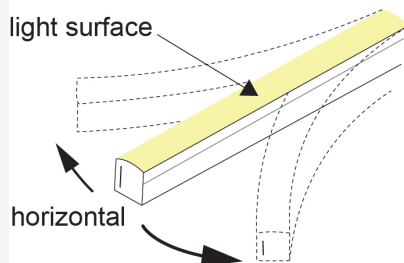

### Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

### Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.