




VARDAflex Neon Piko TVQ S?-?? Flex.
LED-Strip, 24V, 4, 5W/m, Amber
 Article nr.: SPHF631

Flexible LED-Strip sealed in UV, chlorine, salt water · and solvent-resistant white PVC · for indoor- and outdoor use, IP20/66 · · Cuttable every 83.33 mm or 12 LED · Number of LEDs per metre: 144 · LED pitch: 6.94 mm · Beam Angle: 160° · CRI: > - · Luminous flux per meter: 55 lm · Power per meter: 4.5 W · Lifespan L70: >= 36.000 h · WxH in mm: 10 x 10 · · Temperature range: -20 bis +45°C · Processing temperature: +10 bis +45°C · Maximum length per connection: 10 metres · Bending diameter: 100 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4251835866316
Housing colour	Weiss
Width	10.00 mm
Height	10.00 mm
LED colour	Gelb/Amber
Lightoutput per LED	0.38 lm
Lamp	Inklusive LED
IP rating	66
Voltage	24 V

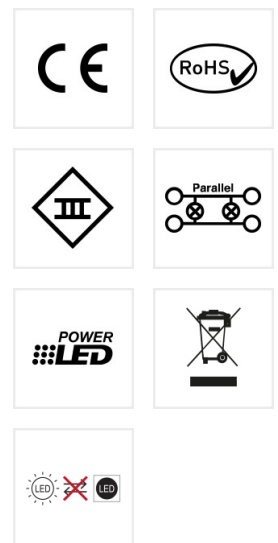




VARDAflex Neon Piko TVQ S?-?? Flex.
LED-Strip, 24V, 4, 5W/m, Amber
 Article nr.: SPHF631

TECHNICAL DATA


Material	Kunststoff
Temperature range	-20 - 45
LED per meter	144
Dimension of segments	83.33 mm

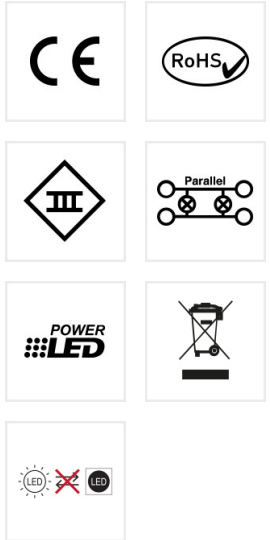



VARDAflex Neon Piko TVQ S?-?? Flex.
LED-Strip, 24V, 4, 5W/m, Amber
 Article nr.: SPHF631

TECHNICAL DRAWING

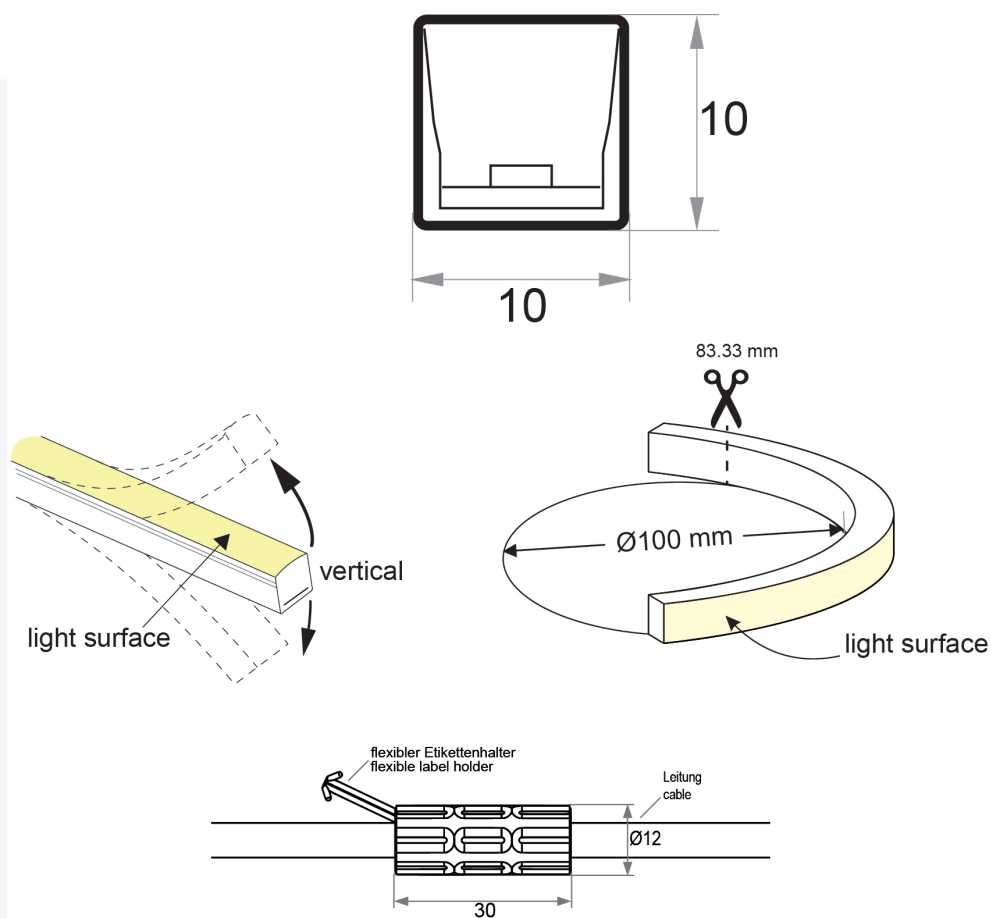

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.