



**VARDAflex Neon Piko TVQ S?-?? Flex.
LED-Strip, 24V, 4, 5W/m, 3000K**
Article nr.: SPHF635

Flexible LED-Strip sealed in UV, chlorine, salt water · and solvent-resistant white PVC · for indoor- and outdoor use, IP20/66 · cuttable every 83.33 mm or 12 LED · Number of LEDs per metre: 144 · LED Pitch: 6.94 mm · Beam Angle: 160° · CRI: > 80 · Luminous flux per meter: 140 lm · Power per meter: 4.5 W · Lifespan L70: >= 36.000 h · WxH in mm: 10 x 10 · Temperature range: -20 bis +45°C · Processing temperature: +10 bis +45°C · Maximum length per connection: 10 metres · Bending diameter: 100 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4251835886352
Housing colour	Weiss
Length	1000.00 mm
Width	10.00 mm
Height	10.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	140.00 lm
Lightoutput per LED	1.00 lm
Lamp	Inklusive LED

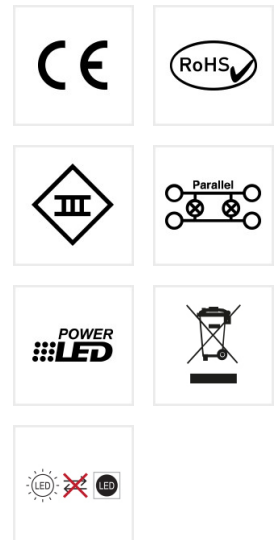


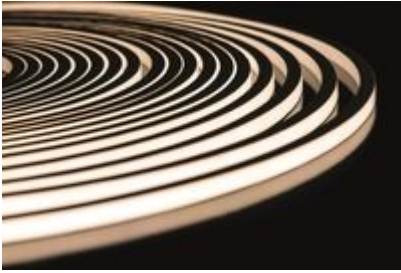


VARDAflex Neon Piko TVQ S?-?? Flex.
LED-Strip, 24V, 4, 5W/m, 3000K
 Article nr.: SPHF635

TECHNICAL DATA


IP rating	66
Voltage	24 V
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	144
Dimension of segments	83.33 mm
CRI	≥ 80

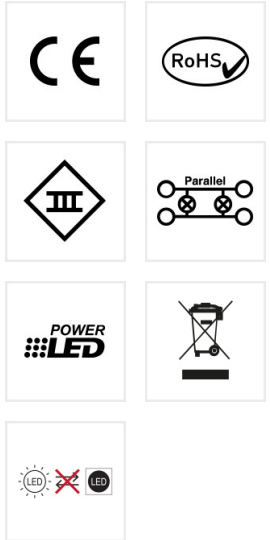

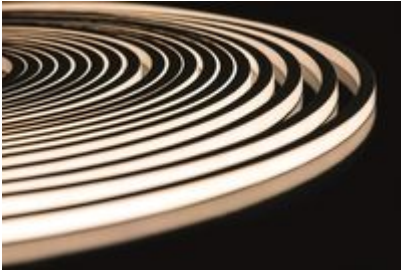

VARDAflex Neon Piko TVQ S?-?? Flex.
LED-Strip, 24V, 4, 5W/m, 3000K
 Article nr.: SPHF635

TECHNICAL DRAWING

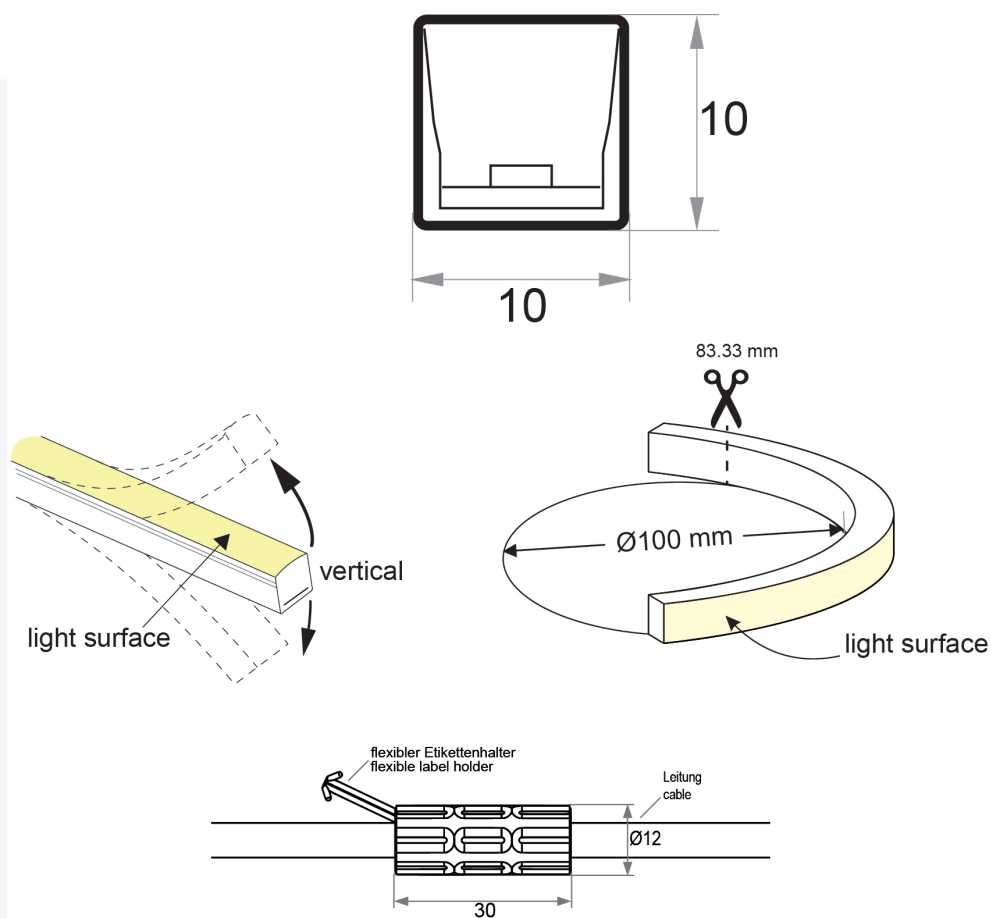

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.