




VARDAflex Platin REACH30 TVQ S?-??
Flex. LED-Strip, 24V, 6W/m, IP68, 2700K
 Article nr.: SPGF042

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone for indoor- and outdoor use, IP67/68 · Cuttable every 55.56 mm / 6 LEDs · amount of LEDs per meter: 108 · LED pitch: 9.26 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 350 lm · voltage: 24V DC · power per Meter: 12 W · lifetime L70B50: >= 72,000 h · WxH in mm: 16 x 17 · temperature range: -45 to +70°C · processing temperature: +10 to +70°C · maximum length per connection: 30 meter · bending diameter vertical: 300 mm · Easy Connection with solderless connector. · anti-wicking ferrule diameter = 12 mm: the anti-wicking ferrule is located at 115 mm from the connector on the cable.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835870429
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	3.24 lm
Lamp	Inklusive LED
IP rating	68
Psb	0,00 W

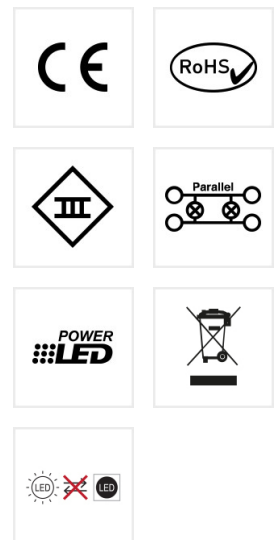




VARDAflex Platin REACH30 TVQ S?-??
Flex. LED-Strip, 24V, 6W/m, IP68, 2700K
 Article nr.: SPGF042

TECHNICAL DATA



Voltage	24 V
Material	Kunststoff
Temperature range	-45 - 70
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 80
Lifetime L70B50	72.000 h





VARDAflex Platin REACH30 TVQ S?-??
Flex. LED-Strip, 24V, 6W/m, IP68, 2700K
 Article nr.: SPGF042

TECHNICAL DRAWING

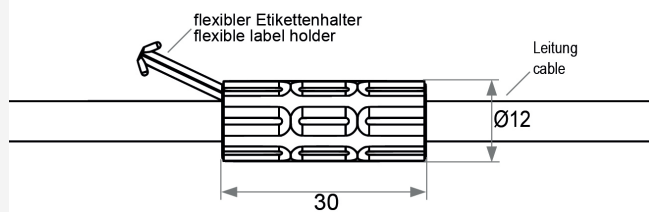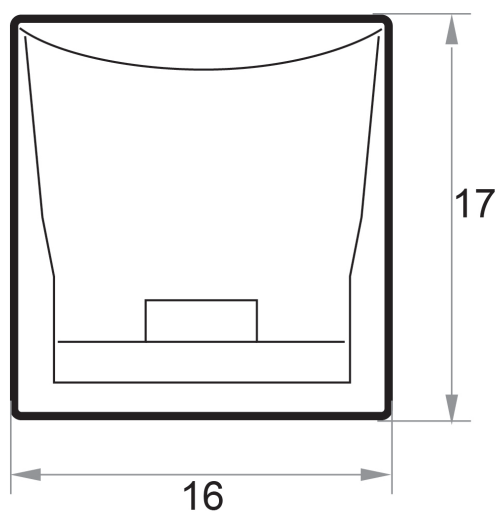

Wasserstop*

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule*

The anti-wicking ferrule is located at 115 mm from the connector on the cable.

*Der Wasserstop ist nicht enthalten bei Bestellungen über rutec Lightdesign.

*The anti-wicking ferrule is not included in orders placed via rutec Lightdesign.