




**VARDAflex Platin Ultra SVQ S?-?? Flex.
LED-Strip, 24V, 15W/m, 2700K**
Article nr.: SPGF583

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone for indoor- and outdoor use, IP67/68 · Cuttable every 55.56 mm / 6 LEDs · Amount of LEDs per meter: 108 · LED pitch: 9.26 mm · Beam angle: 120° · CRI: >80 · Luminous flux per meter: 660 lm · Voltage: 24V DC · Power per Meter: 15 W · Lifetime L70: >= 36.000 h · WxH in mm: 16 x 17 · Temperature range: -40 to +55°C · Processing temperature: +10 to +55°C · Maximum length per connection: 10 meter · Bending diameter horizontal: 300 mm · anti-wicking ferrule diameter = 12 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835875837
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	6.11 lm
Lamp	Inklusive LED
IP rating	68
Voltage	24 V

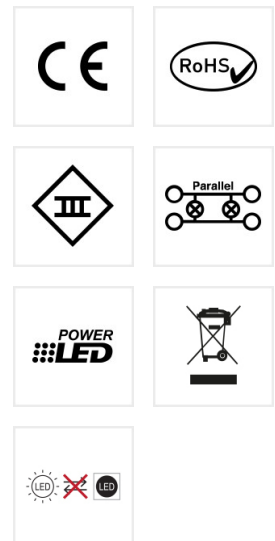




VARDAflex Platin Ultra SVQ S?-?? Flex.
LED-Strip, 24V, 15W/m, 2700K
 Article nr.: SPGF583

TECHNICAL DATA



Material	Kunststoff
Temperature range	-40 - 55
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 80

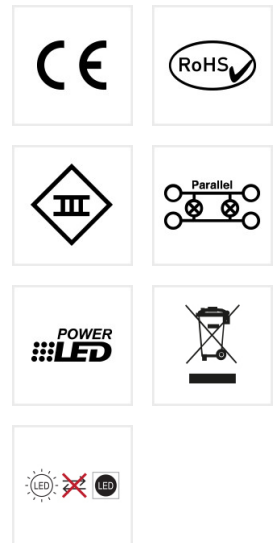



VARDAflex Platin Ultra SVQ S?-?? Flex.
LED-Strip, 24V, 15W/m, 2700K
 Article nr.: SPGF583

TECHNICAL DRAWING

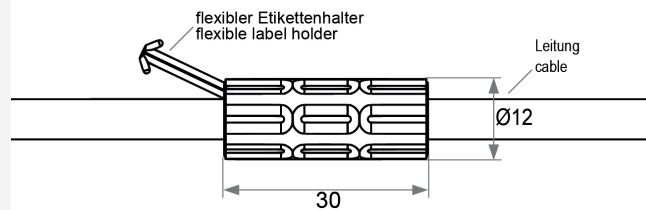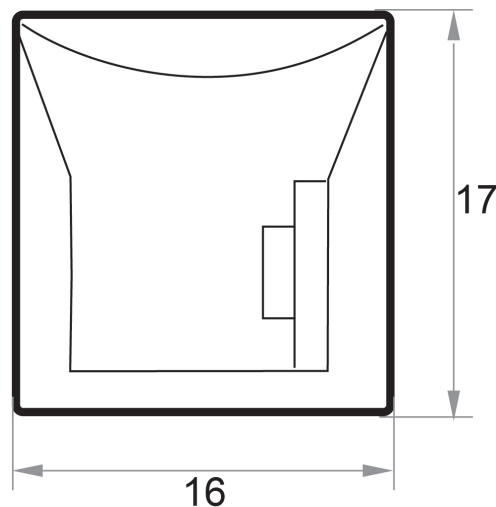

Wasserstop*

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule*

The anti-wicking ferrule is located at 115 mm from the connector on the cable.

*Der Wasserstop ist nicht enthalten bei Bestellungen über rutec Lightdesign.

*The anti-wicking ferrule is not included in orders placed via rutec Lightdesign.