


VARDAflex Platin short cut SVQ S?-?? Flex. LED-Strip, 24V, 12W/m, 2700K

Article nr.: SPGF673

Flexible LED Stripe sealed in UV-, chlorine-, · salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP67/68 · · cuttable every 18.52 mm / 2 LEDs · amount of LEDs per meter: 108 · LED pitch: 9.26 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 750 lm · voltage: 24V DC · power per meter: 15 W · lifespan L70B50: >= 36,000 h · WxH in mm: 16 x 17 · · temperature range: -45 to +70°C · installation temperature: +10 to +70°C · maximum length per connection: 15 meter · Bending diameter horizontal: 300 mm · anti-wicking ferrule diameter = 12 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable. · This product contains a light source of energy efficiency class E.

TECHNICAL DATA

Unit Code	metre
BAR code	4251835876735
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	6.94 lm
Lamp	Inklusive LED
IP rating	68
Psb	0,00 W

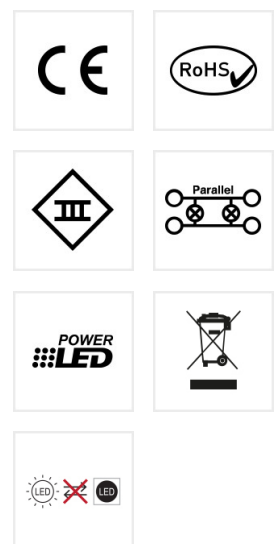


VARDAflex Platin short cut SVQ S?-?? Flex. LED-Strip, 24V, 12W/m, 2700K

Article nr.: SPGF673

TECHNICAL DATA


Voltage	24 V
Material	Kunststoff
Temperature range	-45 - 70
LED per meter	108
Dimension of segments	18.52 mm
CRI	≥ 80
Lifetime L70B50	36.000 h

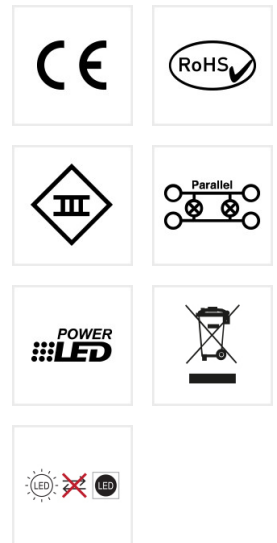

VARDAflex Platin short cut SVQ S?-?? Flex. LED-Strip, 24V, 12W/m, 2700K

Article nr.: SPGF673

TECHNICAL DRAWING

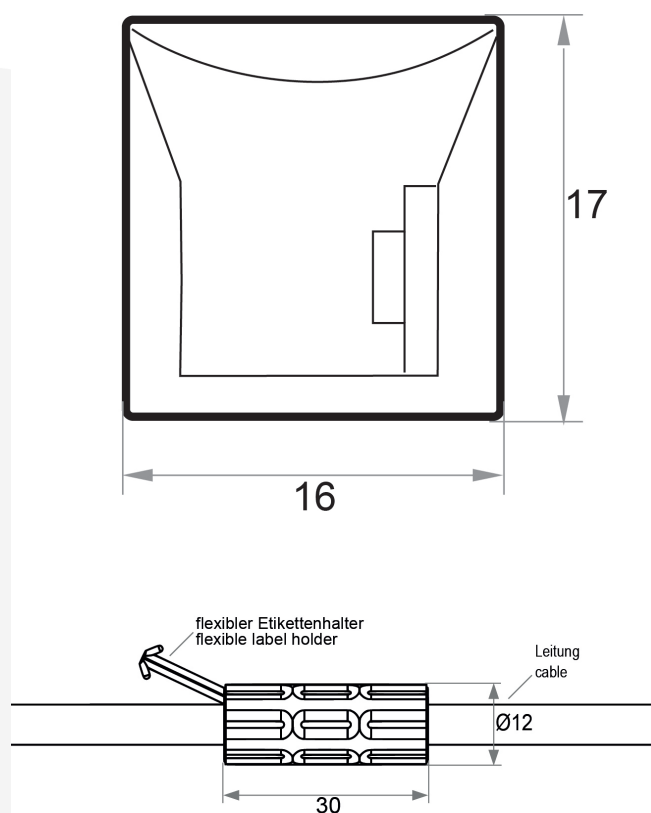

Wasserstop*

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule*

The anti-wicking ferrule is located at 115 mm from the connector on the cable.

*Der Wasserstop ist nicht enthalten bei Bestellungen über rutec Lightdesign.

*The anti-wicking ferrule is not included in orders placed via rutec Lightdesign.