




**TEIGLIN A Decken- und
Wandanbauleuchte L1185, B50,
H35mm, 230V, 56W, IP20, 4000K,
CRI90-RAL9006**

Article nr.: PBA004-9006FS-M

Ceiling luminaire made of anodized aluminum and opal cover for a homogeneous · light emission. Also available as a luminaire suitable for VDU workstations · <UGR19 available. Power supply works for emergency power · for indoor use, IP20 · · housing: power-coated aluminum · housing colour: white aluminum · beam angle: 60° · power: 56 W · light colour: 4000 K · luminous flux: 3.495 lm · CRI: >90 · lifespan L70B50: >= 50,000 h · operating voltage: 110 - 305 V AC · protection class II · · LxWxH in mm: 1.185 x 50,4 x 35 · including LED power supply unit, switchable On/Off · 2-pole connection cable led out of the back of the luminaire · this product contains a light source of energy efficiency class F

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835810043
Housing colour	RAL9006
Length	1185.00 mm
Width	50.40 mm
Height	35.00 mm
LED colour	ca. 4000K neutralweiß
Lightoutput per fixture	3495.00 lm
Lamp	Inklusive LED
IP rating	20

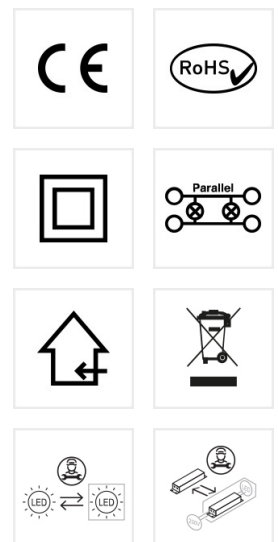




**TEIGLIN A Decken- und
Wandanbauleuchte L1185, B50,
H35mm, 230V, 56W, IP20, 4000K,
CRI90-RAL9006**

Article nr.: PBA004-9006FS-M

TECHNICAL DATA

Power	56 W
Voltage	110-305 V
Material	Aluminium
Tolerance	3.00
Efficiency	91.50
Temperature range	-20 - 40
CRI	≥ 90

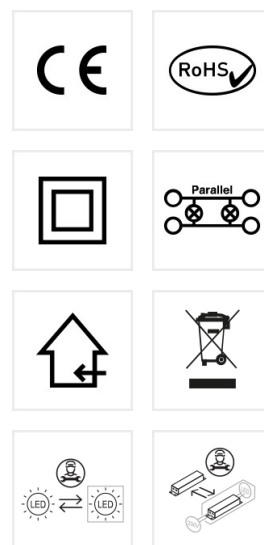



**TEIGLIN A Decken- und
Wandanbauleuchte L1185, B50,
H35mm, 230V, 56W, IP20, 4000K,
CRI90-RAL9006**

Article nr.: PBA004-9006FS-M

TECHNICAL DRAWING

