



**TEIGLIN P Pendelleuchte inklusive
Baldachin L1185, B50, H35mm, 230V,
56W, IP20, 3000K, CRI90-RAL9006**
Article nr.: PBA013-9006FS-M

Pendant luminaire made of anodized aluminum and opal cover for a homogeneous · light emission. Also available as a luminaire suitable for VDU workstations · <UGR19 available. Power supply works for emergency power · for indoor use, IP20 · · housing: power-coated aluminum · housing colour: white aluminum · beam angle: 60° · power: 56 W · light colour: 3000 K · luminous flux: 3.478 lm · CRI: >90 · lifespan L70B50: >= 50,000 h · operating voltage: 110 - 305 V AC · protection class I · · (luminaire) LxWxH in mm: 1.185 x 50.4 x 35 · (canopy) LxWxH in mm: 540 x 38 x 50.4 · including LED power supply unit, switchable On/Off · wire suspension 2.000 mm, flexible shortenable · this product contains a light source of energy efficiency class F

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835810135
Housing colour	RAL9006
Length	1185.00 mm
Width	50.40 mm
Height	35.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	3478.00 lm
Lamp	Inklusive LED
IP rating	20

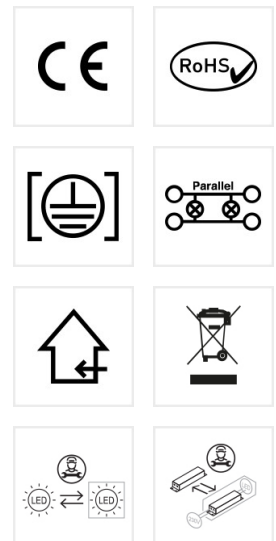

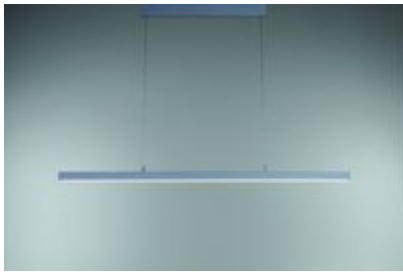


**TEIGLIN P Pendelleuchte inklusive
Baldachin L1185, B50, H35mm, 230V,
56W, IP20, 3000K, CRI90-RAL9006**
Article nr.: PBA013-9006FS-M

TECHNICAL DATA

Power	56 W
Voltage	110-305 V
Lamp base	ohne
Material	Aluminium
Tolerance	3.00
Efficiency	91.50
Temperature range	-20 - 40
CRI	≥ 90
Lifetime L70B50	50.000 h



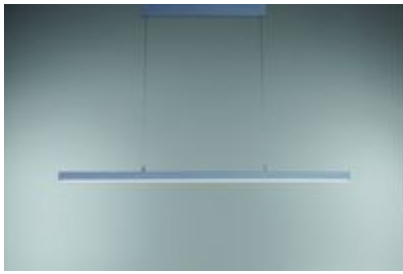

**TEIGLIN P Pendelleuchte inklusive
Baldachin L1185, B50, H35mm, 230V,
56W, IP20, 3000K, CRI90-RAL9006**
Article nr.: PBA013-9006FS-M

TECHNICAL DRAWING

