



**Zubehör LED-Einlegeleuchten-
Vorschaltgerät LED-Vorschaltg.,
Tridonic, dimmbar, Casambi u.a.**
Article nr.: PBZ107

constant current converter, Casambi dimmable · for indoor use, IP20 · with spring clamp connection and strain relief · CE, REACH, RoHS, MM, SELV · protection against overload, short circuit, open circuit and over temperature · protection against surge voltage 1 kV · suitable for emergency lighting systems according to EN 50172 · housing: plastic · input voltage range: 198-264 V AC 50/60 Hz · input voltage range: 176-280 V DC · power output: max. 45 W · current output: 900 mA · voltage output: 25-50 V DC · LxWxH in mm: 210 x 43 x 30 · temperature range: -25 to +50 °C · Vorschaltgerät = Tridonic LC 45W 500-1400mA bDW SC PRE2 28002414 (Zugentlastung) · auf 900mA eingestellt mit I-SELECT 2 PLUG 900MA BL 28001122

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835821070
Housing colour	Weiss
Length	210.00 mm
Width	43.00 mm
Height	30.00 mm
Lamp	without
IP rating	20
Power	22,5-45 W
Current mA	900 mA





Zubehör LED-Einlegeleuchten-
Vorschaltgerät LED-Vorschaltg.,
Tridonic, dimmbar, Casambi u.a.
Article nr.: PBZ107

TECHNICAL DATA




Voltage	220-240 V
Input voltage	198-264
Output voltage	25-50
Material	Kunststoff
Tolerance	3.00
Efficiency	91.00
Temperature range	-25 - 50
Suitable light source	





Zubehör LED-Einlegeleuchten-
Vorschaltgerät LED-Vorschaltg.,
Tridonic, dimmbar, Casambi u.a.
Article nr.: PBZ107

TECHNICAL DRAWING

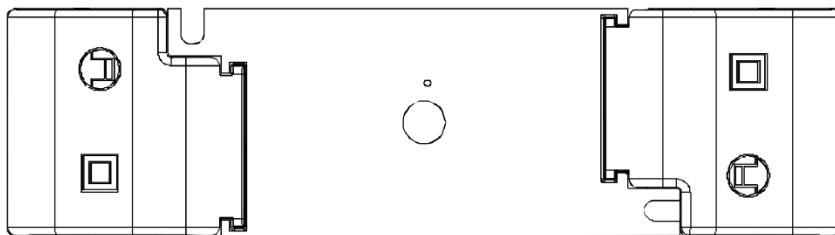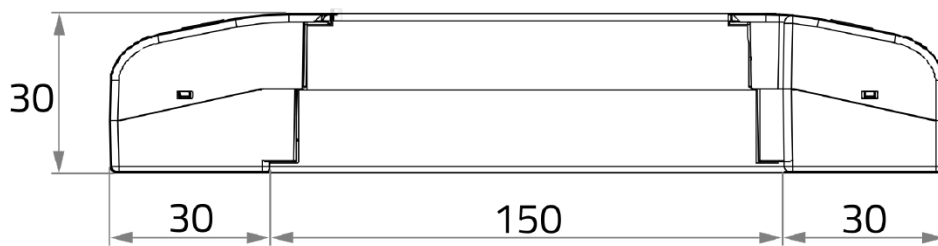

Erlaubter
Kabelmantel-
durchmesser:
2.2 - 9 mm