



TEIGLIN M Videokonferenz-Leuchte, dimmbar L35, B50, H400mm, 230V, 19W, IP20, 4000K, CRI80-RAL9004


Article nr.: PBA018-9004FS

TEIGLIN M as video conference luminaire to support vertical lighting for · video conferencing, especially in the home office. · Two standing pillars of drawn aluminum profile, polyester powder coated in · RAL 9004 fine structure. Front cover of impact-resistant, opal polycarbonate · IP20 · power: 19 W · light colour: 4000 K · luminous flux: 2x 740 lm · CRI: >80 · lifespan L70B50: >= 50,000 h · input voltage range: 230 V AC, 50 Hz · protection class II · LxWxH standing pillar: 35 x 50.4 x 400 mm · diameter of base: 120 mm · with plug-in power supply unit, 1500 mm supply cable and 1300 mm · cable between both luminaires · dimmable with integrated potentiometer/switch · this product contains a light source of energy efficiency class E

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835810180
Housing colour	RAL9004
Length	35.00 mm
Width	50.40 mm
Height	400.00 mm
LED colour	ca. 4000K neutralweiß
Lightoutput per fixture	1480.00 lm
Lamp	Inklusive LED
IP rating	20



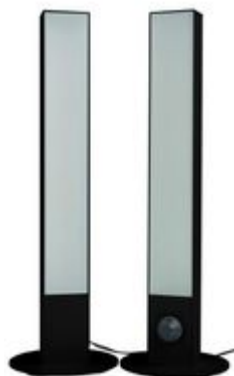



TEIGLIN M Videokonferenz-Leuchte, dimmbar
L35, B50, H400mm, 230V, 19W, IP20, 4000K,
CRI80-RAL9004

Article nr.: PBA018-9004FS

TECHNICAL DATA

Power	19 W
Voltage	100-240 V
Lamp base	ohne
Material	Aluminium
Temperature range	-20 - 45
CRI	≥ 80
Lifetime L70B50	50.000 h




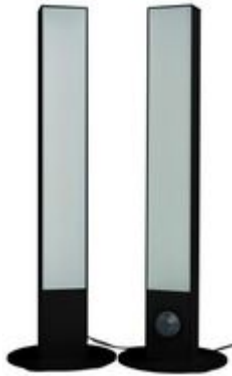


TEIGLIN M Videokonferenz-Leuchte, dimmbar
L35, B50, H400mm, 230V, 19W, IP20, 4000K,
CRI80-RAL9004

Article nr.: PBA018-9004FS

TECHNICAL DRAWING

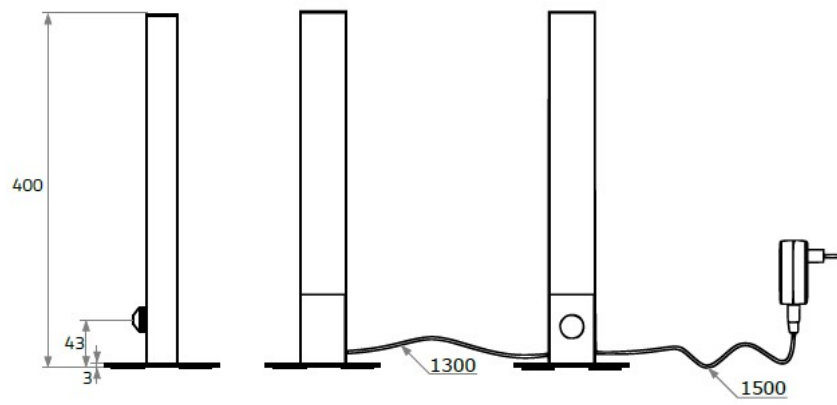

Ø 120



50.4

35

