



ASCAR Wand- und Deckenleuchte


On/Off Ø 620mm, H70mm, 230V, 55W,
IP20, 4000K, CRI80-schwarz

Article nr.: PBE110

Round wall and ceiling light with finely satinised acrylic glass panel · and circular colored ring made of acrylic glass · (at the edge of the light surface) · for indoor use, IP20 · · housing mounting: steel sheet powder-coated · housing: light area: acrylic glass · colour light area/ring: white/black · beam angle: 96° · power: 55 W · light colour: 4000 K · luminous flux: 6,800 lm · CRI: >80 · lifespan L70B50: >= 36,000 h · operating voltage: 220-240 V AC, 50/60 Hz · protection class I · · height: 70 mm · outer diameter: 620 mm · including constant current converter, switchable On/Off · toolless locking mechanism for fast assembly

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835822107
Housing colour	Weiss
Height	70.00 mm
Outer diameter	620 mm
LED colour	ca. 4000K neutralweiß
Lightoutput per fixture	6800.00 lm
Lamp	Inklusive LED
IP rating	20
Power	55 W

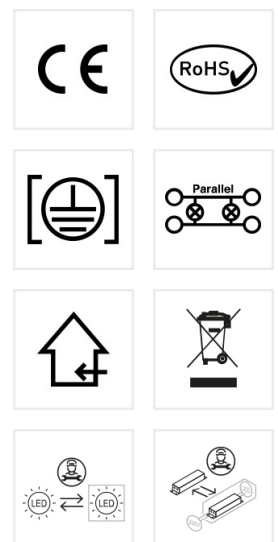



ASCAR Wand- und Deckenleuchte

On/Off Ø 620mm, H70mm, 230V, 55W,
IP20, 4000K, CRI80-schwarz

Article nr.: PBE110

TECHNICAL DATA

Voltage	220-240 V
Material	Stahl
Temperature range	-20 - 50
CRI	≥ 80





ASCAR Wand- und Deckenleuchte

On/Off Ø 620mm, H70mm, 230V, 55W,
IP20, 4000K, CRI80-schwarz

Article nr.: PBE110

TECHNICAL DRAWING

