




**RINDA Wandleuchte 2-Fach mit
Bewegungsmelder L92, B175H504mm, 230V,
27W, IP20, 3000K, CRI80-RAL9006**
Article nr.: PFE233

Wall luminaire made of anodized aluminum and opal cover for a homogeneous · light emission.
Extremely wide beam for beautiful illumination · for indoor use, IP20 · · housing: aluminum anodized ·
housing colour: aluminum · beam angle: 270° · power: 27 W · light colour: 3000 K · luminous flux:
1.380 lm · CRI: >80 · lifespan L70: >= 36.000 h · operating voltage: 100 - 240 V AC · protection class I ·
· LxBxH in mm: 504 x 175 x 92 · including LED power supply unit, switchable On/Off · including motion
control sensor

TECHNICAL DATA

Unit Code		pcs
BAR code	4251835852333	
Housing colour	RAL9006	
Length	92.00 mm	
Width	175.00 mm	
Height	504.00 mm	
LED colour	ca. 3000K warmweiß	
Lightoutput per fixture	1380.00 lm	
Lamp	including LED	
IP rating		20

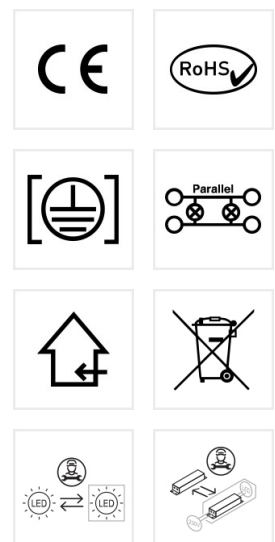




**RINDA Wandleuchte 2-Fach mit
Bewegungsmelder L92, B175H504mm, 230V,
27W, IP20, 3000K, CRI80-RAL9006**
Article nr.: PFE233

TECHNICAL DATA

Power	27 W
Voltage	100-240 V
Lamp base	ohne
Material	Aluminium
Tolerance	5.00
Temperature range	-20 - 40
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

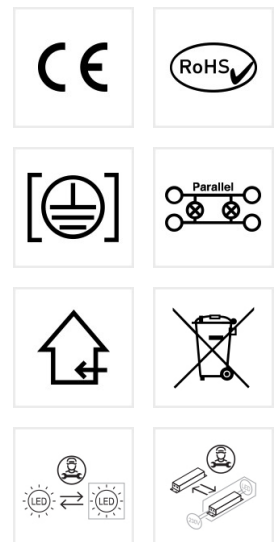



**RINDA Wandleuchte 2-Fach mit
Bewegungsmelder L92, B175H504mm, 230V,
27W, IP20, 3000K, CRI80-RAL9006**
Article nr.: PFE233

TECHNICAL DRAWING

