



VARDAflex Double 5 M- R.


Flex.LEDStrip, 24V, 19, 2W/m, 2600-2900K-Cheese

Article nr.: PGI123

flexible LED Strip with self adhesive backside, · for indoor use, IP20 · · Can be separated every 33.33 mm or 7 LEDs · Number of LEDs: 1050 · LED pitch: 4.76 mm · beam angle: 120° · CRI: >80 · Lumen per meter: 2158 lm · Voltage: 24 V DC · Power per meter: 19.2 W · Lifetime L70B50: >= 50.000 h · energy efficiency class: F · LxWxH in mm: 5.000 x 8 x 1.5 · · Caution: Do not operate strip without aluminium profile · and adequate ventilation. · Maximum length per connection: 5 meter. New connectors for greater length. · Delivery contents: 5 meter roll with 300 mm connecting cable

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835891233
Length	5000.00 mm
Width	8.00 mm
Height	1.50 mm
LED colour	ca. 2800K cheese
Lightoutput per fixture	10790.00 lm
Lightoutput per LED	10.28 lm
Lamp	including LED
IP rating	20

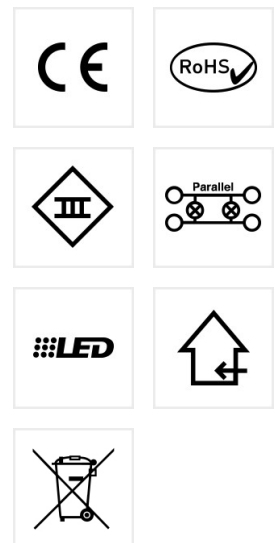




VARDAflex Double 5 M- R.

Flex.LEDStrip, 24V, 19, 2W/m, 2600-
2900K-Cheese

Article nr.: PGI123

TECHNICAL DATA

Power	96 W
Current mA	4.000 mA
Voltage	24 V
Amount of LED	1050
Temperature range	-20 - 45
LED per meter	210
Dimension of segments	33.33 mm
Energy efficiency class	EEK-Label_F
CRI	≥ 80
Lifetime L70B50	50.000 h
Suitable light source	

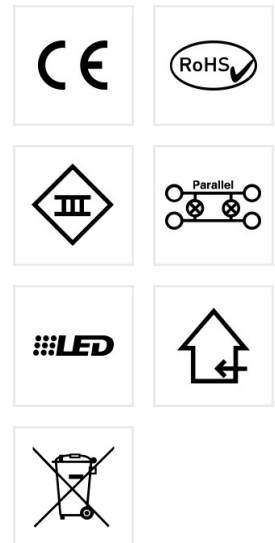



VARDAflex Double 5 M- R.

**Flex.LEDStrip, 24V, 19, 2W/m, 2600-
2900K-Cheese**

Article nr.: PGI123

TECHNICAL DRAWING

